


MISUZU

New!

Achieve high-efficiency
refrigeration with our own
air conditioning system!

Safe and secure
spiral system

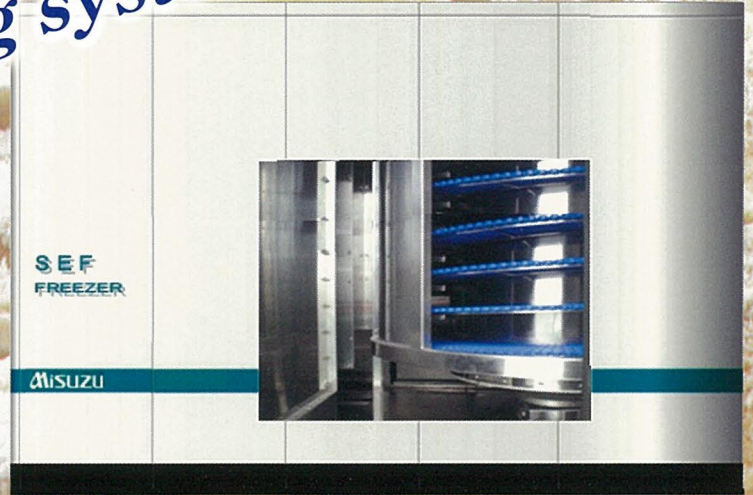

SEF SPIRAL ENDLESS FREEZER

MISUZU KOKI CO., LTD.


Unit Features

- Laminated, making it possible to install in minimal space.
- Cooling efficiency with our own convection system.
- Choose the conveyor belt best suited to your products.
- Sanitary high pressure washing shower.

Basic specifications


- Internal Temperature : -40°C
- Belt Width : 300W~900W
- Belt Materials : Acetal, Stainless steel

*Born from wealth
of experience
and results!*

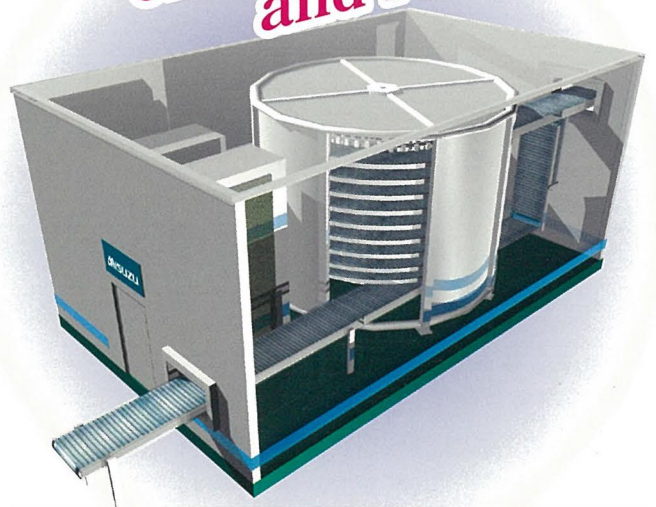

Please ask us about our automated
constant count packaging lines.


SEF SPIRAL ENDLESS FREEZER

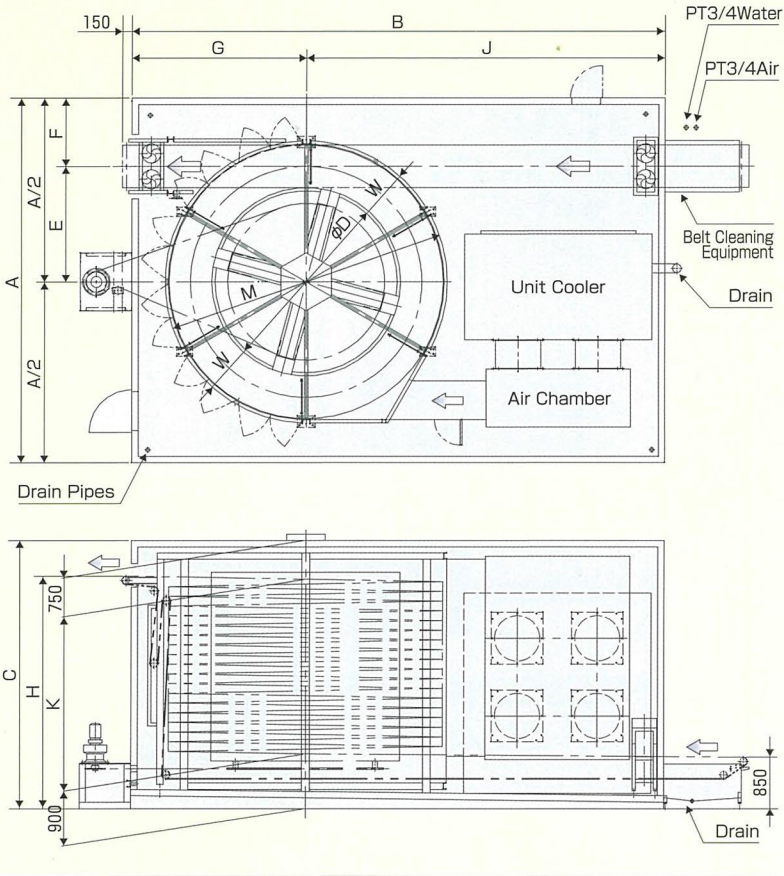

Model : Specifications

- Product Size : $\phi 80$
- Weight : 100 g
- Product Pitch : 100
- Freezing Time : 30mins
- Storage Temp : -40°C
- Specific Heat before Freezing : 0.7
- Specific Heat after Freezing : 0.45
- Product Receiving Temp : 20°C
- Shipping Temp : -18°C

Special Form Specifications

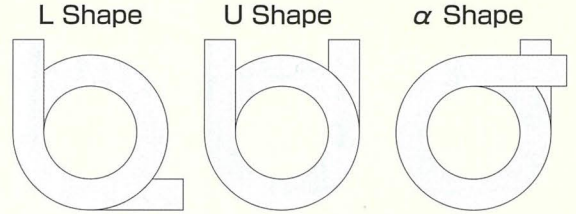

		Full Belt Width		
		18"(457.2)	22"(558.8)	26"(660.4)
Major Dimensions				
Full Belt Width	W	457.2	558.8	660.4
Exterior Width	A	4160	4800	5460
Exterior Length	B	6600	7500	8250
Gauge Diameter	D	$\phi 2020$	$\phi 2460$	$\phi 2920$
	E	1239	1509	1790
	F	841	891	940
	G	2300	2600	2950
	J	4300	4900	5300
	M	$\phi 3130$	$\phi 3770$	$\phi 4430$


Basic specifications

Model		SEF-300		SEF-400		SEF-500		SEF-600	
Items		300kg/h		400kg/h		500kg/h		600kg/h	
Processing Power		1500		2000		2500		3000	
No. of Inventory		18"	22"	18"	22"	22"	26"	22"	26"
Full Belt Width (m/m)	W	457.2	558.8	457.2	558.8	558.8	660.4	558.8	660.4
Effective Belt Width (m/m)		406	508	406	508	508	600	508	600
No. of Transporting Rows		4	5	4	5	5	6	5	6
Effective Belt Length	L	37.5m	30.0m	50.0m	40.0m	50.0m	42.0m	60.0m	50.0m
Belt Stages		6	4	8	6	7	5	8	6
Exterior Height	C	2,550	2,250	2,850	2,550	2,400	2,400	2,850	2,550
	K	900	600	1,200	900	1,050	750	1,200	900
Outlet Height	H	1,850	1,550	2,150	1,850	2,000	1,700	2,150	1,850
Belt speed(m/m)		1.25	1	1.7	1.3	1.7	1.4	2	1.7
Drive Required Power		1.5kw 0.4kw						2.2kw 0.4kw	
Air conditioner Required Power		2.2kw \times 2		1.5kw \times 4				2.2kw \times 4	
Freezer Required Power		37kw		37kw		22kw \times 2		55kw	
Belt Cleaning Equipment		High-temperature, High-pressure Spray Cleaning							


Conveyor Belt

■ Omni Grid

■ Omni Grid Mesh Coverd



■ Modular Plastic Belt



* The specifications in this catalog are subject to change without notice. 20140101Y①1,000

Request a catalog, Contact us

Production and sales



MISUZU KOKI CO., LTD.

530 Kitagomizuka Kusu-Cho Yokkaichi-City Mie 510-0103 Japan
 TEL 81-59-397-3211 FAX 81-59-397-3217
 Headquarters 530 Kitagomizuka Kusu-Cho Yokkaichi-City Mie 510-0103 Japan
 TEL 81-59-397-3216 FAX 81-59-397-3217
 Tokyo Sales Office 3FL, Daimon KS Bldg., 1-2-1, Shibadaimon Minato-Ku, Tokyo 105-0012 Japan
 TEL 81-3-3434-2936 FAX 81-3-3434-2939
 Osaka Sales Office 5FL, Minami Senba Mizorogi Bldg., 2-10-20 Minami Senba Chuo-ku, Osaka-City Osaka, 542-0081 Japan
 TEL 81-6-6241-1091 FAX 81-6-6241-1093

Sales